


Generating set overall dimensions

Open version

GEN5,5K		
Height (A)	mm	1082
Length (B)	mm	1369
Width (C)	mm	750
Weight	kg	225

Optional components

- ⊗ Greater capacity tank.
- ⊗ Special-size base frame.
- ⊗ Compliance with earthquake regulations.
- ⊗ Colour to customer specification
- ⊗ Special treatments for aggressive environments.
- ⊗ Other (please contact us)

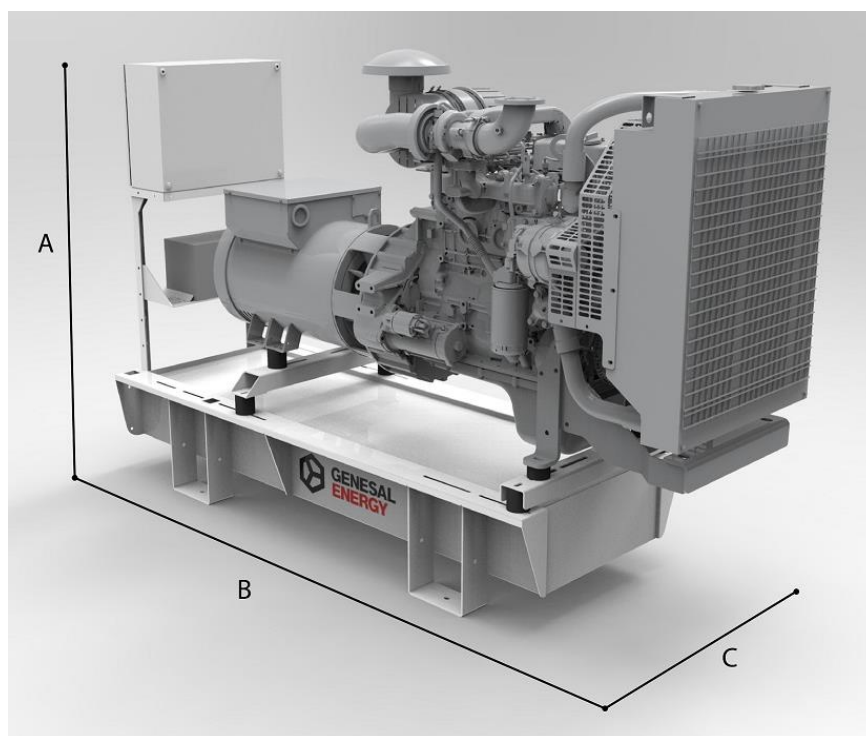


Soundproof version

Modular, soundproof canopy made of galvanised sheet steel. It has large, removable soundproof doors with sound-absorbing material so that access to the inside of the machine whether for inspection or maintenance purposes is easy. Locks (with single key) and stainless-steel hinges. It has been painted with a priming coat and a two-component acrylic-polyurethane finish. Sound power level in accordance with Directive 2005/88/EC of the European Union.

GEN5,5KC		
Height (A)	mm	1342
Length (B)	mm	1950
Width (C)	mm	830
Weight	kg	465

Optional components

- ⊗ Removable doors.
- ⊗ Upper air outlet.
- ⊗ Greater capacity tank.
- ⊗ Aluminium or stainless steel canopy
- ⊗ Colour to customer specification
- ⊗ Special treatments for aggressive environments.
- ⊗ Compliance with earthquake regulations.
- ⊗ Other (please contact us)


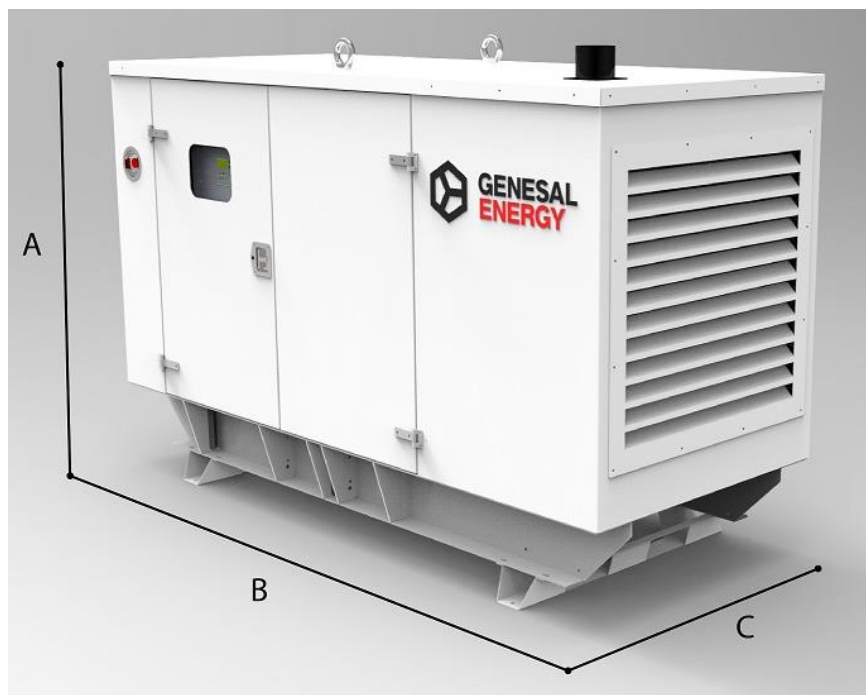


Dimensions and weight correspond to the standard version of the product.



Recommended dimensions for the indoor installation of the open generating set

Minimum room dimensions			Dimensions for ventilation and exhaust gases		
Length	mm	3369	Outlet louvers	m ²	0,15
Width	mm	2750	Inlet louvers	m ²	0,07
Height	mm	2082	Exhaust gas outlet	mm	60

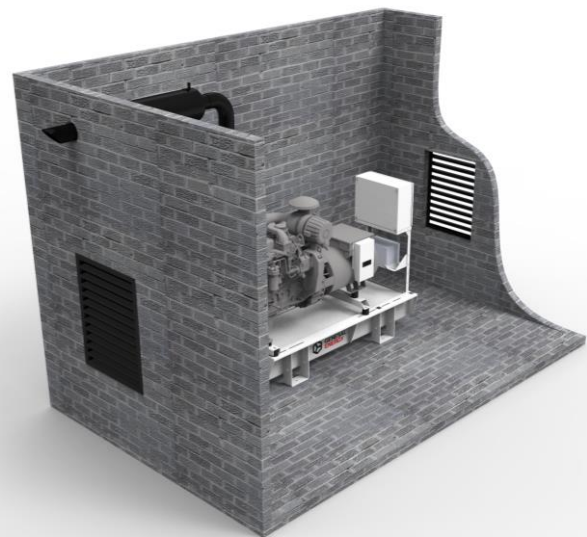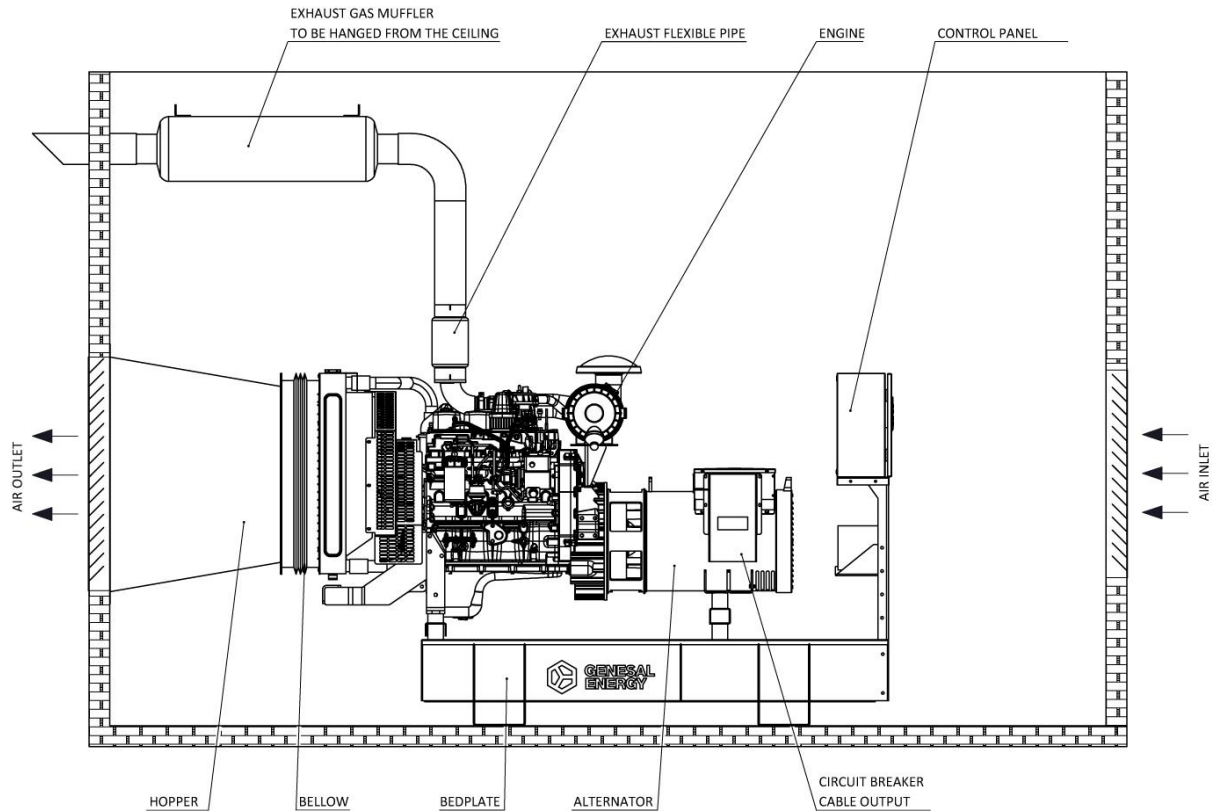



Recommended dimensions for the indoor installation of the soundproof generating set

Minimum room dimensions			Dimensions for ventilation and exhaust gases		
Length	mm	2950	Outlet louvers	m ²	0,3
Width	mm	2830	Inlet louvers	m ²	0,07
Height	mm	2342	Exhaust gas outlet	mm	76

